



NEW

CENTRIFUGAL AIR CURTAIN

FM3509LGS1 FM3512LGS1 (Air speed: 18m/s)

FM4509LGS1 FM4512LGS1 (Air speed: 21m/s)



REMOTE CONTROL AUTODOOR SENSOR FILTER



2 YEAR WARRANTY




FM3509LGS1


(Air speed: 18m/s)

Description

- Centrifugal air curtain, two-speed settings.
- Digital sensor touch control and remote control.
- Available working height is 3 meters to 3.5 meters.
- Capacitor motor, ball bearing, built-in thermal cut-out protection, 100% copper coil, with over 5000 hours continuous troubleproof operation.



DIMENSIONS (mm)

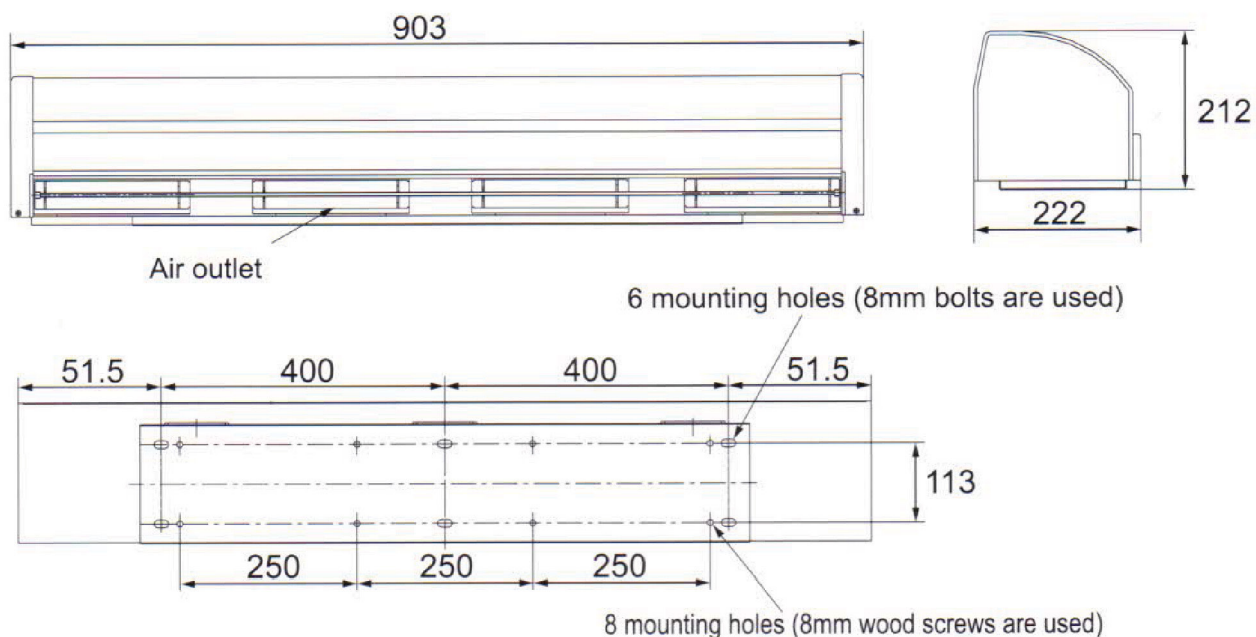

SPECIFICATIONS

Model	Rated Voltage	Input Current (A)	Input Power (W)	Air Speed (m/s)	Air Volume (m ³ /h)	Noise (dB)	Installation High (m)	G.W (kg)	Dimension (mm)	Packing Size (mm)
FM3509LGS1	220V~50/60Hz	1.4	310	15 - 18	1350 - 1550	60~61	3.0 - 3.5	13.7	903x222x212	954x270x280




FM3512LGS1


(Air speed: 18m/s)

Description

- Centrifugal air curtain, two-speed settings.
- Digital sensor touch control and remote control.
- Available working height is 3 meters to 3.5 meters.
- Capacitor motor, ball bearing, built-in thermal cut-out protection, 100% copper coil, with over 5000 hours continuous troubleproof operation.



DIMENSIONS (mm)

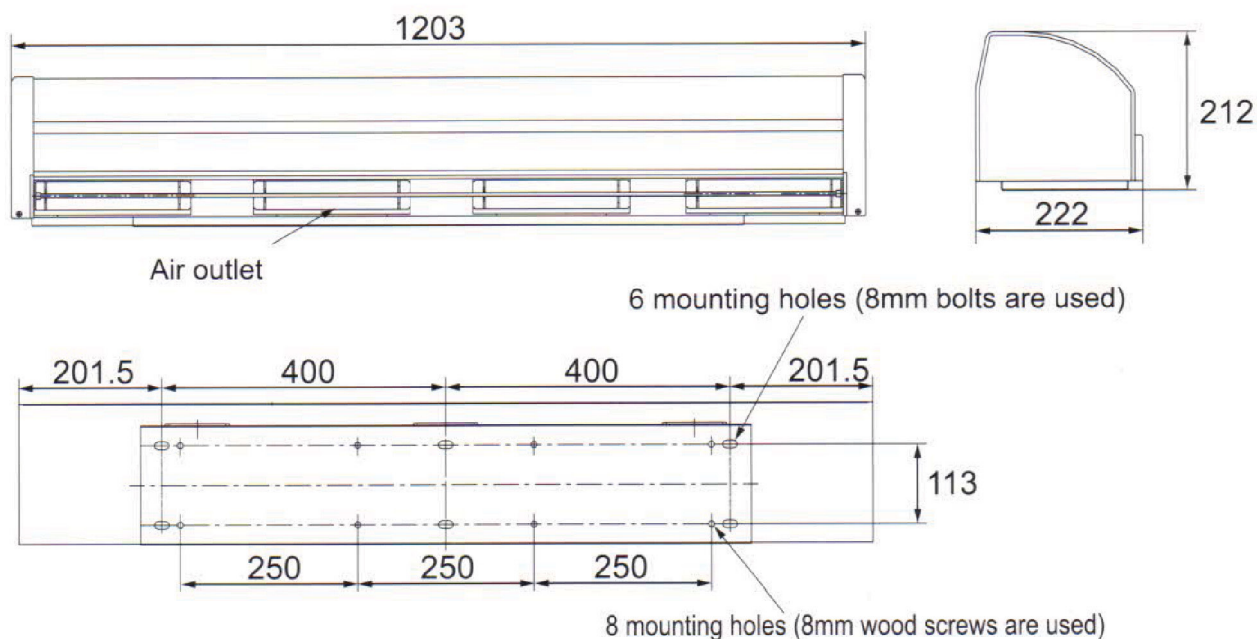

SPECIFICATIONS

Model	Rated Voltage	Input Current (A)	Input Power (W)	Air Speed (m/s)	Air Volume (m ³ /h)	Noise (dB)	Installation High (m)	G.W (kg)	Dimension (mm)	Packing Size (mm)
FM3512LGS1	220V~50/60Hz	1.7	380	15 - 18	1600 - 1850	60~61	3.0 - 3.5	16.6	1203x222x212	1254x270x280





FM4509LGS1


(Air speed: 21m/s)

Description

- Centrifugal air curtain, two-speed settings.
- Digital sensor touch control and remote control.
- Available working height is 4 meters to 4.5 meters.
- Capacitor motor, ball bearing, built-in thermal cut-out protection, 100% copper coil, with over 5000 hours continuous troubleproof operation.



DIMENSIONS (mm)

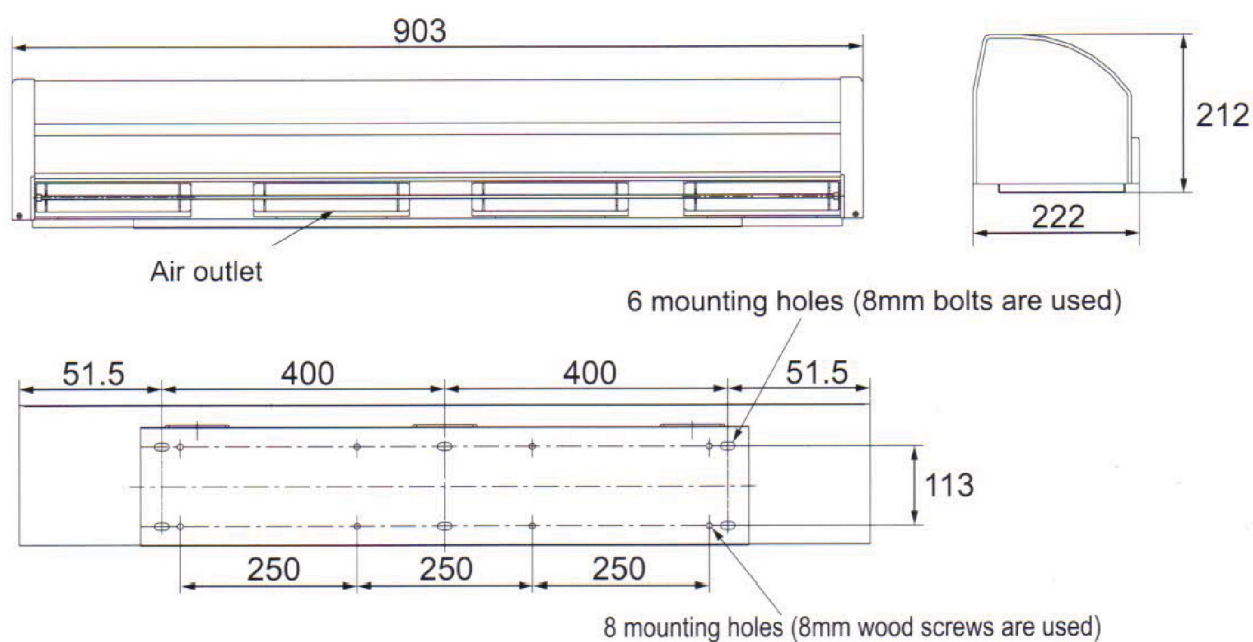

SPECIFICATIONS

Model	Rated Voltage	Input Current (A)	Input Power (W)	Air Speed (m/s)	Air Volume (m ³ /h)	Noise (dB)	Installation High (m)	G.W (kg)	Dimension (mm)	Packing Size (mm)
FM4509LGS1	220V~50/60Hz	1.7	370	18 - 21	1350 - 1550	64~65	4.0 - 4.5	13.7	903x222x212	954x270x280




FM4512LGS1


(Air speed: 21m/s)

Description

- Centrifugal air curtain, two-speed settings.
- Digital sensor touch control and remote control.
- Available working height is 4 meters to 4.5 meters.
- Capacitor motor, ball bearing, built-in thermal cut-out protection, 100% copper coil, with over 5000 hours continuous troubleproof operation.



DIMENSIONS (mm)

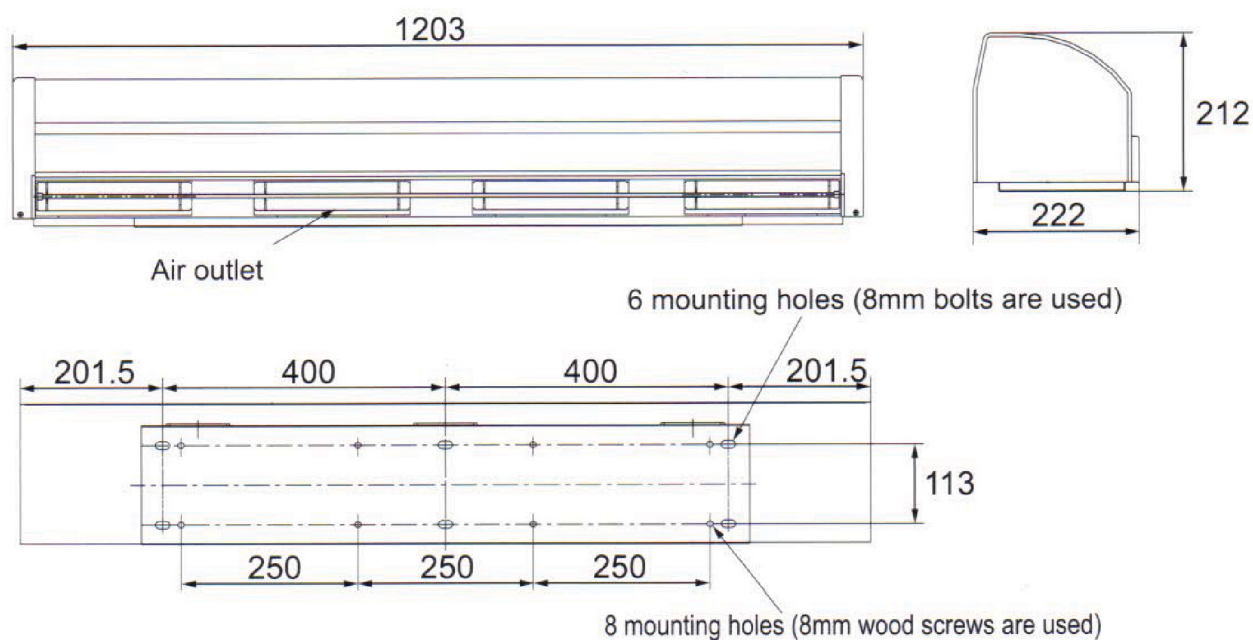

SPECIFICATIONS

Model	Rated Voltage	Input Current (A)	Input Power (W)	Air Speed (m/s)	Air Volume (m ³ /h)	Noise (dB)	Installation High (m)	G.W (kg)	Dimension (mm)	Packing Size (mm)
FM4512LGS1	220V~50/60Hz	2.1	460	18 - 21	1600 - 1850	64~65	4.0- 4.5	16.6	1203x222x212	1254x270x280



P : 0122842402

E : yaser.hbm@gmail.com

Jeddah_Baladiya Street_Al Suhaili Center Building 1